

```

void e2rom_write_2byte(unsigned char *txbuf)
{
  unsigned short status;
  unsigned char adrs, txnum, wait;

  IIC01_StopCondition();

  adrs = E2rom_Address_A0;
  txnum = Data_Number_2;
  wait = 5;
  status = IIC01_MasterSendStart(adrs, txbuf, txnum, wait);
}

```

Fig 1

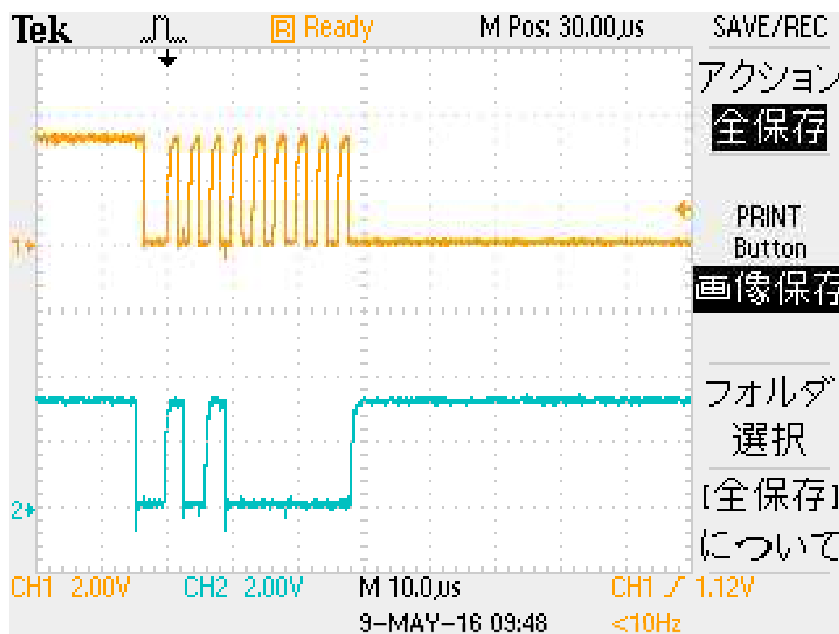


Fig 2

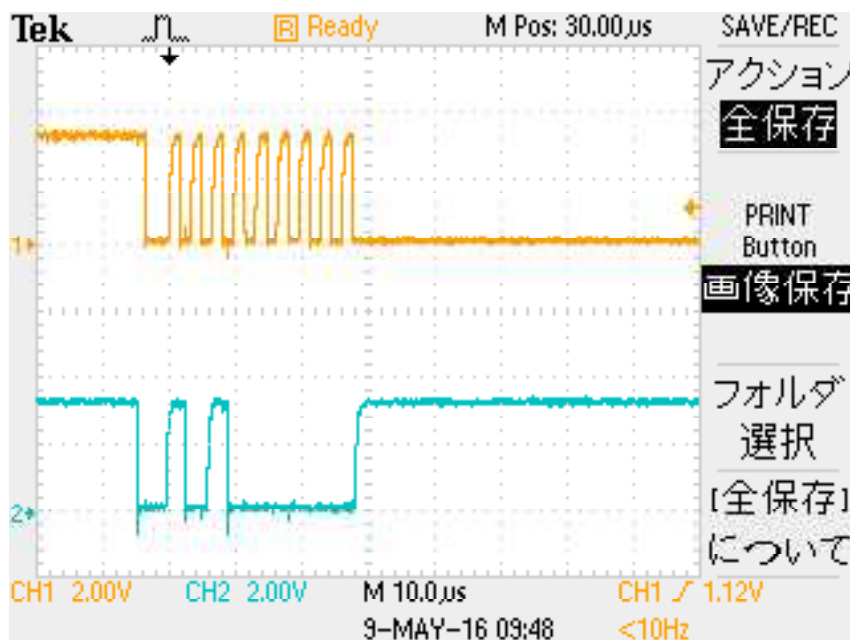


Fig 3